

X-FLOW S-14

MICROFILTRATION MEMBRANE

MEMBRANE ELEMENT DATASHEET

8" S-14 FSFC PSU
 TYPE1 ARTICLE CODE : 2451RB452NG
 TYPE2 ARTICLE CODE : 2451RB452NG2

GENERAL INFORMATION

S-14 is a microfiltration module used for clarification of beer. Mode of operation is feed and bleed with crossflow and regular backwash and CIP, as specified by the installation supplier.


The module is available in two types depending on the sealing, material of the end cap used and the clamp type. For S-14 Type 1 [2451RB452NG], the End Cap material is PSF and a DIN tri-clamp is used. For S-14 Type 2 [2451RB452NG2] the End Cap material is stainless steel and a TC-100 clamp is used.

MATERIALS OF CONSTRUCTION

- Art. No. 14107: End cap S-14 Type 1: PSF (in case of Double Decker 50% Art. No 18036; Transfer Cap Type 1: AISI 316)
- Art. No. 32035: Tri-clamp S-14 Type 1: AISI 316
- Art. No. 32041: O-ring concentrate Type 1, EPDM
- Art. No. 2451RB452NG: S-14 module Type 1: Housing PSF; Flow distributor PES; Potting EP resin; Membrane PES/PVP
- Art. No. 2451RB452NG2: S-14 module Type 2: Housing PSF; Flow distributor PES; Potting EP resin; Membrane PES/PVP
- Art. No. : 32TCS100 + 32TCB100A: TC-100 Type 2: AISI 304
- Art. No. 32032: O-ring Concentrate Type 2: EPDM
- Art. No. 18037B: End cap Type 2: AISI 316 (in case of Double Decker 50% Art. No 18038; Transfer Cap Type 2: AISI 316)
- Art. No. 32040: O-ring S-14 permeate Type 1 and 2: EPDM

ELEMENT SPECIFICATIONS

Membrane Diameter [mm]	Membrane area [m ²]	Length L1 [mm]	Length L2 [mm]	Module diameter D1 [mm]	Feed connection D1 [mm]	Feed connection D2 [mm]	Permeate connection D3 [mm]
1.5	9.8	1172	1010	200	217.5 (189)	106 (80)	50.5 (32)

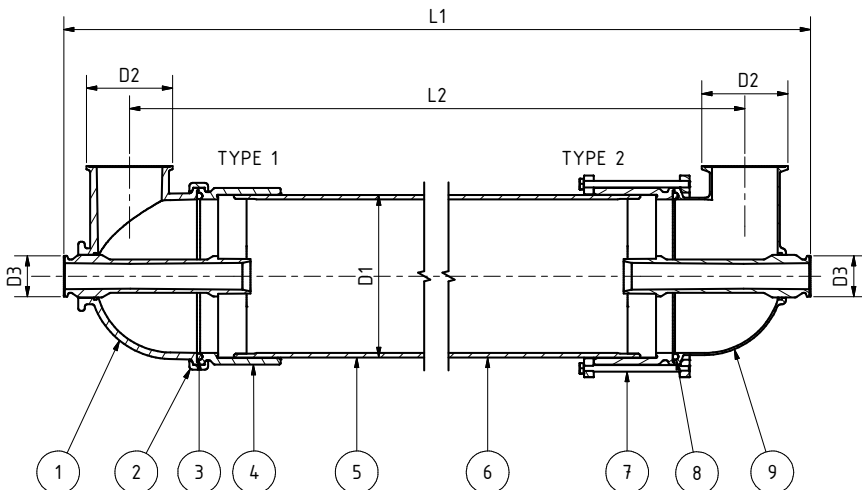

X-FLOW S-14

MICROFILTRATION MEMBRANE

MEMBRANE ELEMENT DATASHEET

OPERATING SPECIFICATIONS

Max. system pressure		Max. transmembrane pressure		Max. backflush pressure		Temperature range
[kPa]		[kPa]		[kPa]		[°C]
0 - 40 °C	600	0 - 30 °C	300	0 - 30 °C	200	80
40 - 60 °C	500	30 - 60 °C	200	30 - 60 °C	150	
60 - 80 °C	400	60 - 80 °C	100	60 - 80 °C	100	

- Dry weight of total membrane module (incl. End caps and Clamps):
 - ca. 16.5 kg S-14 Type 1
 - ca. 19.5 kg S-14 Type 2
- Cleaning fluids should be of permeate quality or better.
- Cleaning pumps should be made of non-corroding materials.
- To avoid mechanical damage, do not subject the membrane module or element to sudden temperature changes. Do never exceed the temperatures mentioned by the installation builder. During heating or cooling the max value 3°C/min above 35°C should never be exceeded. Failure to adhere to this guideline could result in irreparable damage.

MEMBRANE CHARACTERISTICS

- X-Flow B.V. product code: 1.5 MF05XL M2
- Hydrophilic membrane composed of a blend of polyvinylpyrrolidone and polyethersulfone
- Structure asymmetric/microporous
- High performance and a very good anti-fouling behaviour

CLEANING CHEMICAL RESISTANCE

Operation of membrane modules at any combination of maximum limits of pH, concentration of chemicals, pressure or temperature, during cleaning or production as mentioned in the documents supplied by the installation supplier, could influence the membrane and/or module lifetime.

START-UP

- New module should be cleaned during a complete CIP, before start up with beer
- The use of lubricant based on fat or oil should be avoided at any time.

CERTIFICATIONS

- USA: FDA compliant (CFR 177.1440, CFR 177.1655, CFR 177.2440 and CFR 177.2600)
- Europe: tested according to EU regulation EC 1935/2004 and EC 10/2011

STORAGE

Dry membrane modules should be stored in a dry, normally ventilated place, away from sources of heat, ignition and direct sunlight. Store between 0 and 40 °C at a relative humidity below 80% in their original packaging.



X-FLOW BV

P.O. BOX 739, 7500 AS ENSCHEDE, NETHERLANDS WWW.X-FLOW.COM

Note: The information and data contained in this document are based on our general experience and are believed to be correct. They are given in good faith and are intended to provide a guideline for the selection and use of our products. Since the conditions under which our products may be used are beyond our control, this information does not imply any guarantee of final product performance and we cannot accept any liability with respect to the use of our products. The quality of our products is guaranteed under our conditions of sale. Existing industrial property rights must be observed.
DS S-14 EN 1915 © 2015 Pentair. All Rights Reserved.

