


Q-STYLE SPECIFICATIONS

TECHNICAL DATA SHEET




CHARACTERISTICS

Flow rates: 10-550 m³/h
 No elements: 3-70
 Elements length: 30/40/50/70
 Cartridge flow: Outside-inside
 Housing layout: Vertical
 Features: Quick opening, no bolts
 Ideal: Modular/skid/ container
 Design pressure: 6/10 bar

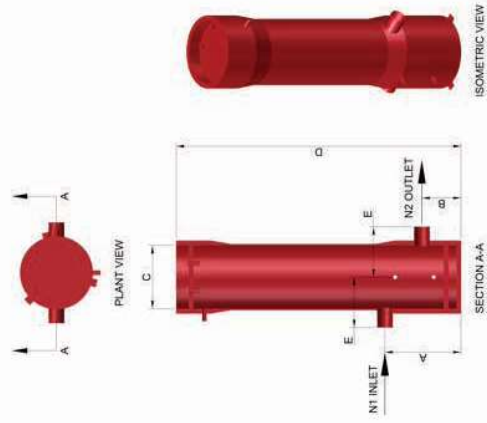

Q-STYLE Quick Opening Cartridge Filter Housing

Filter Housing model reference	Cartridges Qty x Length	Flow at 3gpm - 0,91 m ³ /h per 10"	Flow at 4gpm - 1,12 m ³ /h per 10"	Flow at 5gpm - 1,5 m ³ /h per 10"	N1 / N2 (inch/mm)	A (inch/mm)	B (inch/mm)	C (inch/mm)	D (inch/mm)	E (inch/mm)
		3x30	3x40	3x50						
Q-PCF-3-30	3 x 30	27 / 6	36 / 8	45 / 10	1,5 / 40	9 / 235	3 / 85	6 / 150	41 / 1046	6 / 150
Q-PCF-3-40	3 x 40	36 / 8	48 / 11	60 / 13	2 / 40	9 / 235	3 / 85	6 / 150	51 / 1300	6 / 150
Q-PCF-3-50	3 x 50	45 / 10	60 / 14	75 / 17	2 / 50	9 / 235	3 / 85	6 / 150	61 / 1554	6 / 150
Q-PCF-5-30	5 x 30	45 / 10	60 / 14	75 / 17	2 / 50	9 / 235	3 / 85	8 / 200	41 / 1046	7 / 180
Q-PCF-5-40	5 x 40	60 / 14	80 / 18	100 / 22	2,5 / 80	9 / 235	3 / 85	8 / 200	51 / 1300	7 / 180
Q-PCF-5-50	5 x 50	75 / 17	100 / 23	125 / 28	2,5 / 80	9 / 235	3 / 85	8 / 200	61 / 1554	7 / 180
Q-PCF-6-30	6 x 30	54 / 12	72 / 16	90 / 20	2 / 50	17 / 443	8 / 200	10 / 250	61 / 1559	8 / 210
Q-PCF-6-40	6 x 40	72 / 16	96 / 22	120 / 27	2,5 / 80	17 / 443	8 / 200	10 / 250	71 / 1813	8 / 210
Q-PCF-6-50	6 x 50	90 / 20	120 / 27	150 / 34	2,5 / 80	17 / 443	8 / 200	10 / 250	81 / 2067	8 / 210
Q-PCF-12-30	12 x 30	108 / 24	144 / 33	180 / 40	3 / 80	19 / 473	9 / 230	12 / 300	61 / 1559	10 / 260
Q-PCF-12-40	12 x 40	144 / 33	192 / 44	240 / 54	4 / 80	19 / 473	9 / 230	12 / 300	71 / 1813	10 / 260
Q-PCF-12-50	12 x 50	180 / 40	240 / 55	300 / 67	4 / 100	19 / 473	9 / 230	12 / 300	81 / 2067	10 / 260
Q-PCF-22-30	22 x 30	198 / 45	264 / 60	330 / 74	4 / 100	19 / 473	9 / 230	16 / 400	61 / 1559	12 / 310
Q-PCF-22-40	22 x 40	264 / 60	352 / 80	440 / 99	6 / 125	19 / 473	9 / 230	16 / 400	71 / 1813	12 / 310
Q-PCF-22-50	22 x 50	330 / 75	440 / 100	550 / 123	6 / 125	19 / 473	9 / 230	16 / 400	81 / 2067	12 / 310
Q-PCF-35-30	35 x 30	315 / 71	420 / 96	525 / 118	6 / 125	21 / 533	10 / 255	20 / 500	62 / 1579	14 / 360
Q-PCF-35-40	35 x 40	420 / 96	560 / 127	700 / 157	6 / 150	21 / 533	10 / 255	20 / 500	72 / 1833	14 / 360
Q-PCF-35-50	35 x 50	525 / 119	700 / 159	875 / 196	6 / 200	21 / 533	10 / 255	20 / 500	82 / 2087	14 / 360
Q-PCF-50-30	50 x 30	450 / 102	600 / 137	750 / 168	6 / 150	22 / 568	10 / 255	24 / 600	63 / 1599	16 / 410
Q-PCF-50-40	50 x 40	600 / 136	800 / 182	1000 / 224	8 / 200	22 / 568	10 / 255	24 / 600	73 / 1853	16 / 410
Q-PCF-50-50	50 x 50	750 / 170	1000 / 228	1250 / 280	8 / 200	22 / 568	11 / 280	24 / 600	83 / 2107	16 / 410
Q-PCF-70-30	70 x 30	630 / 143	840 / 191	1050 / 235	8 / 200	24 / 620	11 / 280	28 / 700	64 / 1619	20 / 500
Q-PCF-70-40	70 x 40	840 / 190	1120 / 255	1400 / 314	8 / 200	25 / 629	11 / 280	28 / 700	74 / 1873	20 / 500
Q-PCF-70-50	70 x 50	1050 / 238	1400 / 319	1750 / 392	10 / 250	25 / 629	12 / 305	28 / 700	84 / 2127	20 / 500
Q-PCF-70-70	70 x 70	1470 / 333	1960 / 446	2450 / 549	10 / 300	25 / 629	12 / 305	28 / 700	104 / 2635	20 / 500

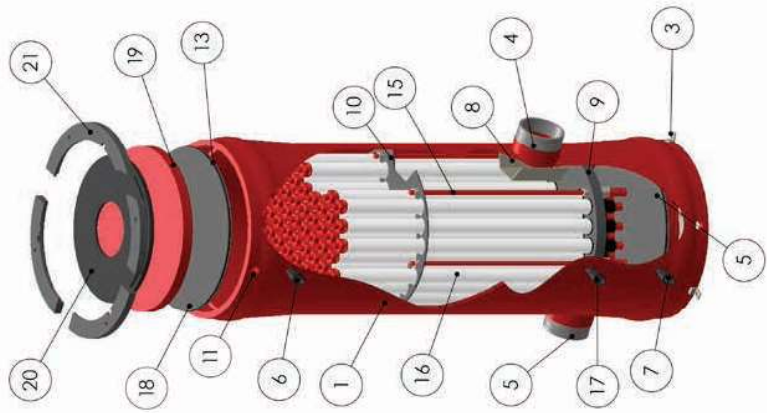

MATERIALS

1. Shell & cap / Main body: FRP
2. Support legs: SS 316
3. Inlet flange: FRP
4. Outlet flange: FRP
5. Air vent: FRP
6. Clean drain: FRP
7. Deflector plate: FRP
8. Tube sheet: PVC/FRP
9. Guide plate: PVC/PP
10. Lifting lugs: FRP
11. Main body gaskets: EPDM
12. Support rod: PA + FRP
13. Cartridge element: PP
14. Dirty drain: FRP
15. O-ring support plate: PVC
16. Structural plate: FRP
17. Securing plate: PP
18. Locking rings: PP

OUR STANDARD FILTER HOUSINGS ARE DESIGNED WITH PIEDMONT CONNECTION TO YOUR PIPING HOIST (LIFTING ARM) OPTIONAL. COURTESY (OR SIMILAR) FOR A MORE ECONOMIC AND SIMPLE

